

DOCKET NO.: 218071US6PCT

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

IN RE APPLICATION OF: Leigh Martin JOHNSON et al.  
SERIAL NO.: NEW U.S. PCT APPLICATION  
FILED: HERewith  
INTERNATIONAL APPLICATION NO.: PCT/GB00/02705  
INTERNATIONAL FILING DATE: July 19, 2000  
FOR: TEE CONNECTION TO A PIPELINE

**REQUEST FOR PRIORITY UNDER 35 U.S.C. 119**  
**AND THE INTERNATIONAL CONVENTION**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

In the matter of the above-identified application for patent, notice is hereby given that the applicant claims as priority:

<b><u>COUNTRY</u></b>	<b><u>APPLICATION NO</u></b>	<b><u>DAY/MONTH/YEAR</u></b>
Great Britain	9917360.1	24 July 1999
Great Britain	0010328.3	28 April 2000

Certified copies of the corresponding Convention application(s) were submitted to the International Bureau in PCT Application No. PCT/GB00/02705. Receipt of the certified copy(s) by the International Bureau in a timely manner under PCT Rule 17.1(a) has been acknowledged as evidenced by the attached PCT/IB/304.

Respectfully submitted,  
OBLON, SPIVAK, McCLELLAND,  
MAIER & NEUSTADT, P.C.



Gregory J. Maier  
Attorney of Record  
Registration No. 25,599  
Surinder Sachar  
Registration No. 34,423



22850

(703) 413-3000  
Fax No. (703) 413-2220  
(OSMMN 1/97)

11-000001  
SERIAL 42 - 404015-14



PCT/GB 00 / 02705



INVESTOR IN PEOPLE

10/030119  
**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 18 AUG 2000

WIPO

PCT

GB00/02705

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that by virtue of an assignment registered under the Patents Act 1977, the application is now proceeding in the name as substituted.

EJU

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

1st August 2000

11/11/11



INVESTOR IN PEOPLE

GB9917360.1

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

BG INTELLECTUAL PROPERTY LTD  
100 Thames Valley Park Drive  
READING  
RG6 1PT  
United Kingdom

Incorporated in the United Kingdom

[ADP No. 07817760001]





INVESTOR IN PEOPLE

GB9917360.1

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

BG TRANSCO PLC  
100 Thames Valley Park Drive  
READING  
Berkshire  
RG6 1PT—  
—United Kingdom—

Incorporated in the United Kingdom

[ADP No. 07904220001]





THE PATENT OFFICE

E

24 JUL 1999

The  
Patent  
Office

1/77

26JUL99 E464465-1 D02969

P01/7700 0.00 - 9917360.1

The Patent Office

Cardiff Road

Newport

Gwent NP9 1RH

# request for grant of a patent

the notes on the back of this form. You can also get  
an explanatory leaflet from the Patent Office to help  
you fill in this form)

1. Your reference

GRC 5028

2. Patent application number

(The Patent Office will fill in this part)

24 JUL 1999

9917360.1

3. Full name, address and postcode of the or of  
each applicant (underline all surnames)

BG plc

100 Thames Valley Park Drive, Reading

Berkshire, RG6 1PT, GB

SECTION 30 (1977 ACT) APPLICATION FILED

SECTION 30 (1977 ACT) APPLICATION FILED

Patents ADP number (if you know it)

If the applicant is a corporate body, give the  
country/state of its incorporation

England & Wales

7166598001 ✓

4. Title of the invention

Tee Connection to a Pipeline

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(including the postcode)

John R W Burrridge

Intellectual Property Department

BG plc, 100 Thames Valley Park Drive,

Reading, Berkshire, RG6 1PT, GB

Patents ADP number (if you know it)

7369762001 ✓

6. If you are declaring priority from one or more  
earlier patent applications, give the country  
and the date of filing of the or of each of these  
earlier applications and (if you know it) the or  
each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise  
derived from an earlier UK application,  
give the number and the filing date of  
the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right  
to grant of a patent required in support of  
this request? (Answer 'Yes' if:

yes

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an  
applicant, or

c) any named applicant is a corporate body.

See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	8
Claim(s)	2
Abstract	1
Drawing(s)	2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

*J.R.W. Burridge*

Date

*22 July 1999*

12. Name and daytime telephone number of person to contact in the United Kingdom

John R W Burridge 01189 29 2071

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

strengths for different applications. Different grout material provides a different exothermic reaction which will determine the volume change after installation. It will also be understood that the volume change of epoxy grout should be optimized to minimize the internal stress system within the grout.

In order to ensure there is a good key for the grout, the external surface of pipeline and the inner surface of the first and second parts of the branch assembly may be dressed up or grit blasted prior to the assembly being mounted on the pipeline.

Conveniently, jacking means are employed to space the first part from the pipeline when the first and second parts have been secured together on the pipeline.

The jacking means may be hydraulically operated. For example, the jacking means may comprise a plurality of jacking members slidably mounted in apertures in the first part and pressure-applying means mounted with respect to the first part and behind the jacking members and being urged under hydraulic pressure against the jacking members to cause the jacking members to be urged towards the pipeline to positions to space the first part from the pipeline.

Conveniently, the jacking members are slidably mounted in bosses or the like secured or fixed to the first part, in

which case the pressure-applying members are also slidably mounted in the bosses or the like.

When the jacking members are in position spacing the first part from the pipeline, stop means are fixed in position with respect to the first part to prevent the jacking members moving away from the pipeline.

Advantageously, the pressure-applying means are removably mounted with respect to the first part, and the stop means are adapted to occupy the positions occupied by the pressure-applying means when the latter are removed.

The stop means may be screwed into position in threaded supporting members fixed to the first part.

Conveniently, one or more load bearing members are positioned between the pipeline and the jacking members to spread the applied load when the jacking members are in position spacing the first part from the pipeline.

The load bearing members may be in the form of enlarged feet on the jacking members, the surfaces of which feet may

generally correspond to the profile of the pipeline. Alternatively, the load bearing members may be secured to the pipeline, in positions so that they will be engaged or contacted by the jacking members.

The invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 shows schematically the top and bottom parts of a branch assembly to be used in a method according to the invention;

Figure 2 is a schematic plan view of a pipeline on which is positioned a containment ring and an annular sealing ring in preparation of the pipeline receiving the top part of the branch assembly;

Figure 3 is a schematic side view of the pipeline on which the top and bottom parts of the branch assembly have been secured together in position;

Figure 4 is a schematic view in the direction of arrow A in Figure 3;

Figure 5 is a similar view to that shown in Figure 4 but of a modified arrangement in which the jacking means is hydraulically operated; and

Figure 6 is a view similar to Figure 5 but showing stop means occupying the positions previously occupied by the pressure-applying means, as in Figure 5.

With reference to Figure 1, there is shown a branch assembly 1 comprising a first part 2 forming the upper part of the assembly and a second part 3 forming the lower part.

The upper part and lower parts of the assembly 1 are made of carbon steel and have generally part cylindrical portions 4 and 5, respectively, which are securable together about a pipeline 6 via flanges 7 and 8 which extend longitudinally along each side of the upper and lower parts, as can be clearly seen in Figure 3.

The flanges 7 of the upper part 2 have apertures 9 which are intended to align with apertures 10 in the flanges 8 of the lower part 3 so that securing bolts 11 (see Figures 3 and 4) can be passed therethrough to secure the two parts 2 and 3 together on the pipeline.

The upper cylindrical portion 4 includes an apertured section 12 from which extends a short branch pipe 13 terminating in an annular flange 14 to which a branch pipeline having an end flange can be connected in a known fashion (not shown) after the assembly 1 is securely bonded to the pipeline 6.

By way of illustration of the invention, a method of securing the tee assembly 1 to a steel pipeline is described below.

Initially, the area of the external surface of the pipeline to which the branch assembly is to be secured is grit blasted (not shown), as are the inner surfaces of the part-cylindrical portions 4 and 5 of the upper and lower parts of the branch assembly.

A containment ring 16 made of steel and shaped so as to conform to the shape of the pipeline is positioned on the pipeline around the area 6a from which the branch pipe 13 of the branch is to extend.

An annular seal 17 made for example of rubber or polymer and metal and of greater thickness than the containment ring 16 is then placed within the containment ring so as substantially to conform to the shape of the pipeline 6 (see Figure 2).

The upper part 2 of the branch assembly is lowered onto the seal 17, with the bore 13a of the branch pipe 13 being centralised with the area 6a surrounded by the seal and containment ring, the lower part 3 is moved into position on the pipeline, and the upper and lower parts 2 and 3 of the assembly are secured together by means of bolts 11 used in association with the aligned apertures 9 and 10 in the flanges 7 and 8 (see Figures 3 and 4).

Jacking bolts 18 are mounted in the wall of the lower part 3 of the branch assembly. These jacking bolts extend through the wall of the lower part to engage or bear on the surface of the pipeline 6, and can be turned from the outside of the assembly to be loosened or tightened against the wall of the pipeline. The jacking bolts 18 are adjusted so that the annular seal 17 is sufficiently compressed to provide a suitable seal prior to the introduction of epoxy grout.

Once the tee assembly 1 is in position on the pipeline, a generally cylindrical or annular space or gap 19 is left or defined between the upper and lower parts 2 and 3 and the external surface of the pipeline 6.

The annular space is bounded by sealing means 20, such as suitable putty which is located between the branch assembly and the pipeline at the opposite ends of the assembly, and by the annular seal 17.

The grout is then injected into the annular space 19 via injection opening 21, located towards the bottom of the lower part of the assembly, to fill the annular space. An outlet opening 22 for expressed air and excess injected grout is provided in the upper part of the assembly. After the annular space 19 is filled with grout, the grout is allowed to cure and thereby bond the upper and lower parts 2 and 3, and thus the branch assembly 1, to the pipeline.



When the assembly is securely bonded by the grout to the pipeline, the jacking bolts 18 can be, optionally, loosened off to ensure load is fairly or more evenly distributed on the pipeline by the grout.

In Figures 5 and 6 an alternative method of jacking is illustrated. The lower part 3 is provided with apertures 23 in which are slidably mounted jacking members 24 each carrying enlarged feet 25 which match the profile of the pipeline and are for engaging or contacting the surface of the pipeline. Bosses 26 having through bores 27 are secured to the lower part 3. The through bores 27 are for slidably receiving the free, outer ends of the jacking members 24. ~~Hydraulically~~ operated means 28 comprising cylinder means 29 are mounted on the bosses 26. Each cylinder means 29 comprises a cylinder 30 and a pressure-applying means 31 in the form of a piston is slidably mounted in the cylinder 30. The cylinders 30 are aligned with respective ones of the bores 27 of the bosses 26. The pistons are also slidably mounted in the bores 27 of the bosses 26. Hydraulic pressure is applied through lines 32, 33, 34 to the respective cylinders 30 from a common main line 35 to a source 36 of hydraulic pressure. On applying appropriate hydraulic pressure to the cylinders 30 the pistons 3 are urged against the jacking members 24 to cause the jacking members to be urged towards and against the pipeline 6 such

that the annular seal 17 is compressed and a generally annular space or gap 19 is formed as described earlier.

The enlarged feet 25 serve as load bearing members that spread the load applied to the pipeline via the jacking members.

After the grout has been injected into the annular space 19 and allowed to cure, as described above, the cylinder means 29, including the pistons, are removed from the bosses 26 and stops 37 (see Figure 6) are inserted into the bosses and fixed in position therein butting up against the back ends of the jacking members, thereby occupying the positions previously occupied by the pistons, to prevent the jacking members moving away from the pipeline. The stops 37 may be externally threaded as at 37a and screwed into bosses 26 which are correspondingly internally threaded as at 26a. The provision of the fixed stops 37 removes reliance on the continued integrity of the cured grout behind the enlarged feet to prevent unwanted movement of the jacking members 24 away from the pipeline. Thus, if the cured grout behind the enlarged feet 25 should deteriorate and disintegrate or "fail", the stops 37 hold the pipeline in position relative to the shell assembly.

In a modification (not shown) the enlarged feet on the jacking members may be replaced by load bearing members

secured to the pipeline in positions so that they will be engaged or contacted by the jacking members.

With the branch assembly securely bonded to the pipeline, known "live" procedures can be performed for cutting out a coupon from area 6a of the pipeline (not shown) and joining a branch pipeline (not shown) to the branch utilising the branch pipe 13. Such known procedures will not be described here.

A method according to the invention, examples of which are described above, enables a branch assembly to be bonded to a pipeline without having to employ welding techniques. This is a particular advantage where "live" pipelines are involved, especially where there are high product flow rates through the pipeline. Other advantages of using such a method include minimising unnecessary pressure reduction in the pipeline and enabling cost savings for installations.

## CLAIMS

1. A method for securing a branch assembly to a pipeline, wherein the branch assembly comprises a first part for locating on the side of the pipeline remote from the side from which the branch is to extend, and a second part incorporating the branch, the method comprising positioning a containment ring on the pipeline at the required position on the pipeline and surrounding the area from which the branch is to extend, positioning an annular seal on the pipeline so that the seal is wholly radially within the containment ring, positioning the second part of the branch assembly onto the seal, positioning the first part of the assembly on the pipeline and securing the first and second parts together so as to compress the seal and leave an annular space between the first and second parts and the external surface of the pipeline, providing sealing means for substantially preventing grout from escaping from the annular space, and introducing into the annular space grout that cures to bond the branch assembly in position on the pipeline.
2. A method as claimed in claim 1, wherein the first part forms the lower part of the assembly and the second part forms the upper part of the assembly.

3. A method as claimed in claim 1 or 2, wherein the annular seal is made of rubber or of a polymer and metal composite.
4. A method as claimed in any of the preceding claims, wherein the grout is injected into the annular space between the first and second parts and the external surface of the pipeline.
5. A method as claimed in any of the preceding claims, wherein jacking means are employed to space the first part from the pipeline when the first and second parts have been secured together on the pipeline.
6. A method as claimed in claim 6, in which the jacking means is hydraulically operated.
7. A method as claimed in claim 6, in which the jacking means comprises a plurality of jacking members slidably mounted in apertures in the first part and pressure-applying means mounted with respect to the first part and behind the jacking members and being urged under hydraulic pressure against the jacking members to cause the jacking members to be urged towards the pipeline to positions to space the first part from the pipeline.

8. A method as claimed in claim 7, in which the jacking members are slidably mounted in bosses or the like secured or fixed to the first part, and the pressure-applying members are also slidably mounted in the bosses or the like.
9. A method as claimed in claim 7 or 8, in which when the jacking members are in position spacing the first part from the pipeline, stop means are fixed in position with respect to the first part to prevent the jacking members moving away from the pipeline.
10. A method as claimed in claim 7, 8 or 9, in which the pressure-applying means are removably mounted with respect to the first part, and the stop means are adapted to occupy the positions occupied by the pressure-applying means when the latter are removed.
11. A method as claimed in claim 10, in which the stop means are screwed into position in threaded supporting members fixed to the first part.
12. A method as claimed in any of claims 7 to 11, in which one or more load bearing members are positioned between the pipeline and the jacking members to spread the applied load when the jacking members are in position spacing the first part from the pipeline.

13. A method as claimed in claim 12, in which the load bearing members are in the form of enlarged feet on the jacking members.
14. A method as claimed in claim 13, in which the surfaces of the feet generally correspond to the profile of the pipeline.
15. A method as claimed in claim 12, in which the load bearing members are secured to the pipeline in positions so that they will be engaged or contacted by the jacking members.
16. A method as claimed in claim 1 and substantially as hereinbefore described with reference to Figures 1 to 4, or Figures 1 to 4 as modified by Figures 5 and 6, of the accompanying drawings.

## ABSTRACT

Figure 3

## TEE CONNECTION TO A PIPELINE

A method is provided for securing a branch assembly 1 to a "live" pipeline 6. An upper part 2 of the assembly incorporating the branch 13 is positioned on the pipeline over a containment ring 16 located on the pipeline and within which there is an annular seal 17 surrounding an area 6a from which the branch is to extend. A lower part 3 of the assembly is positioned on the pipeline beneath the upper part and the two parts are secured together so that the seal is compressed and an annular space 19 is left between the two parts and the external surface of the pipeline. Grout is injected into the annular space 19 and cures to bond the two parts forming the branch assembly in position on the pipeline. The use of grout avoids having to use welding techniques on a "live" pipeline. A coupon can be cut out of the pipeline, via the access through the branch.



INFORMAL

1/5

FIG. 1.


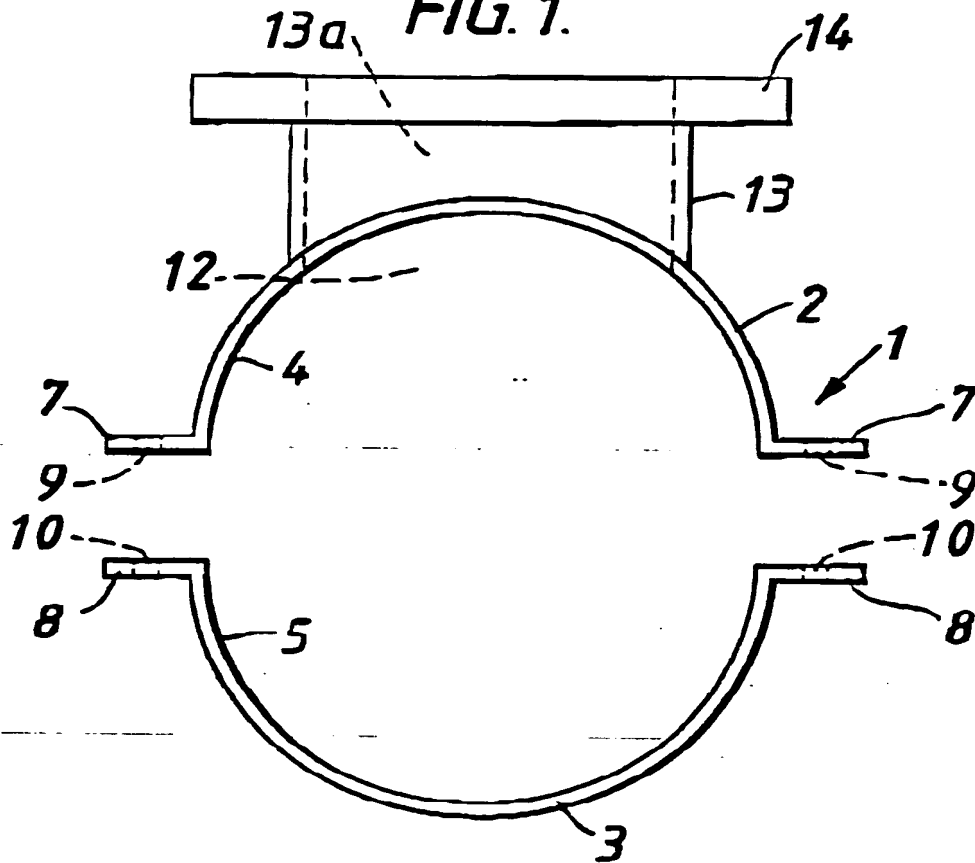



FIG. 2.



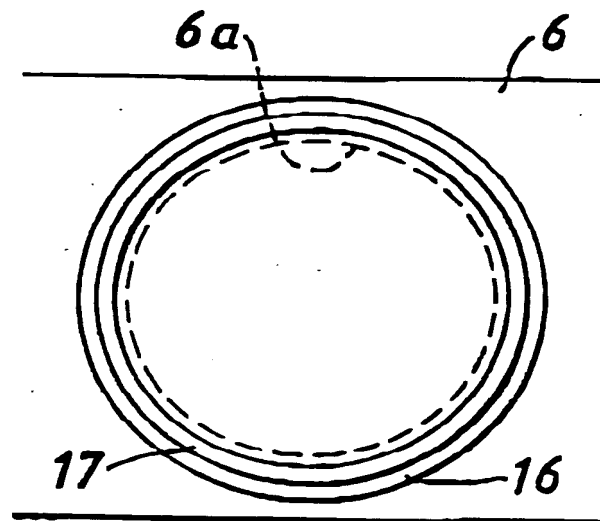

INFORMAL

2/5

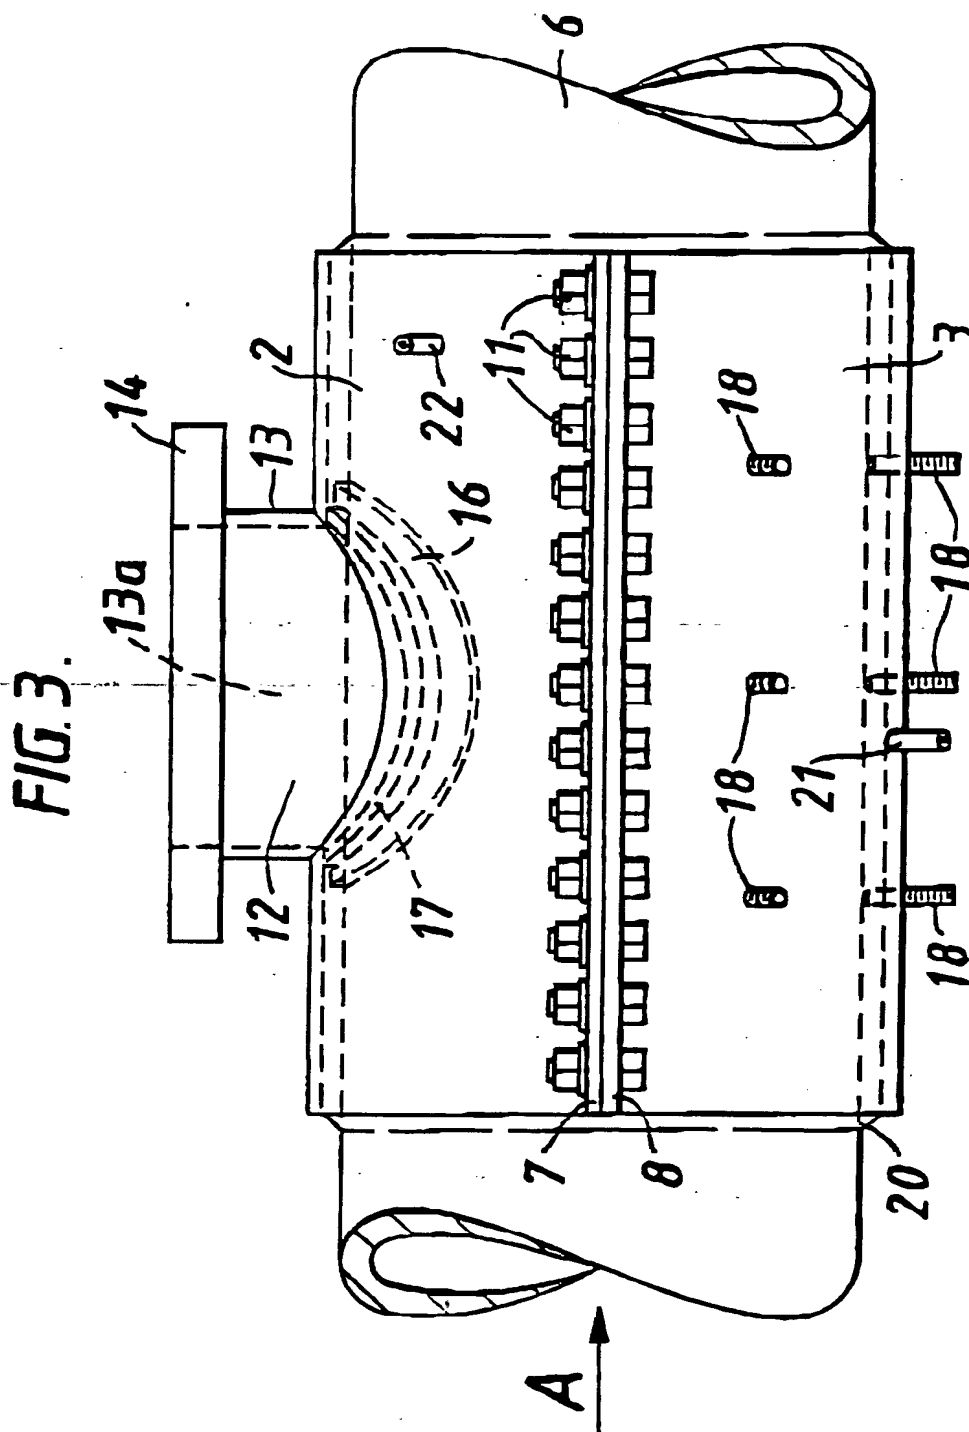




INFORMAL

3/5

FIG. 4.

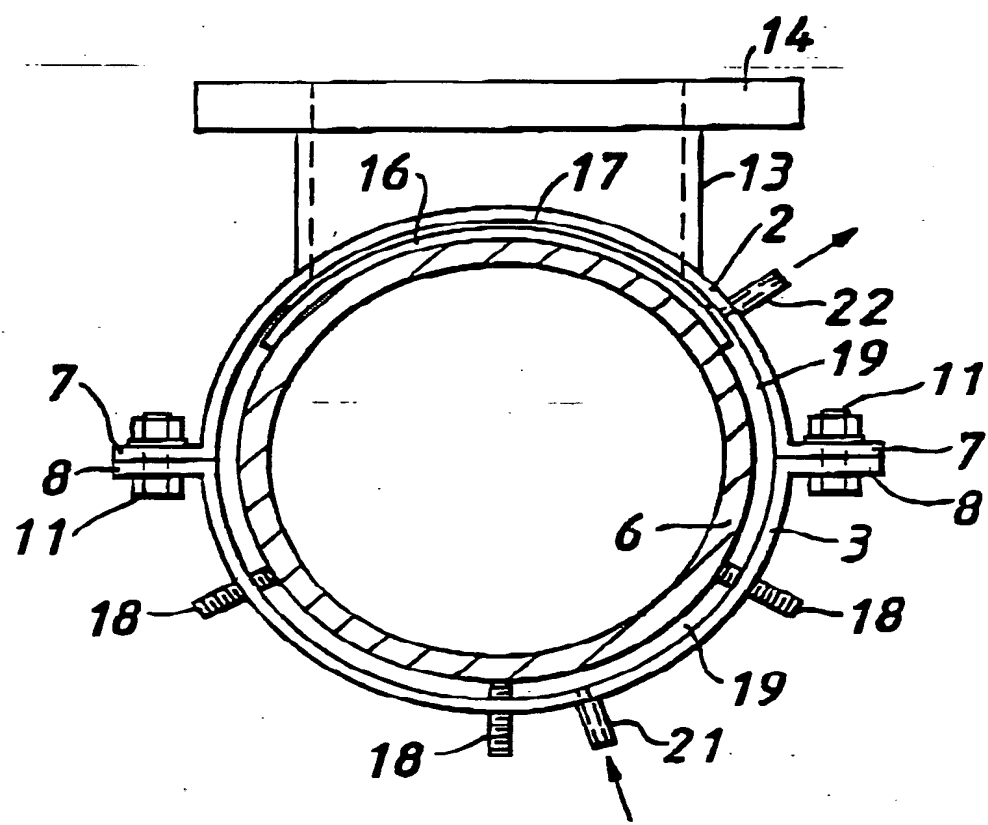




# INFORMAL

4/5

**FIG. 5**

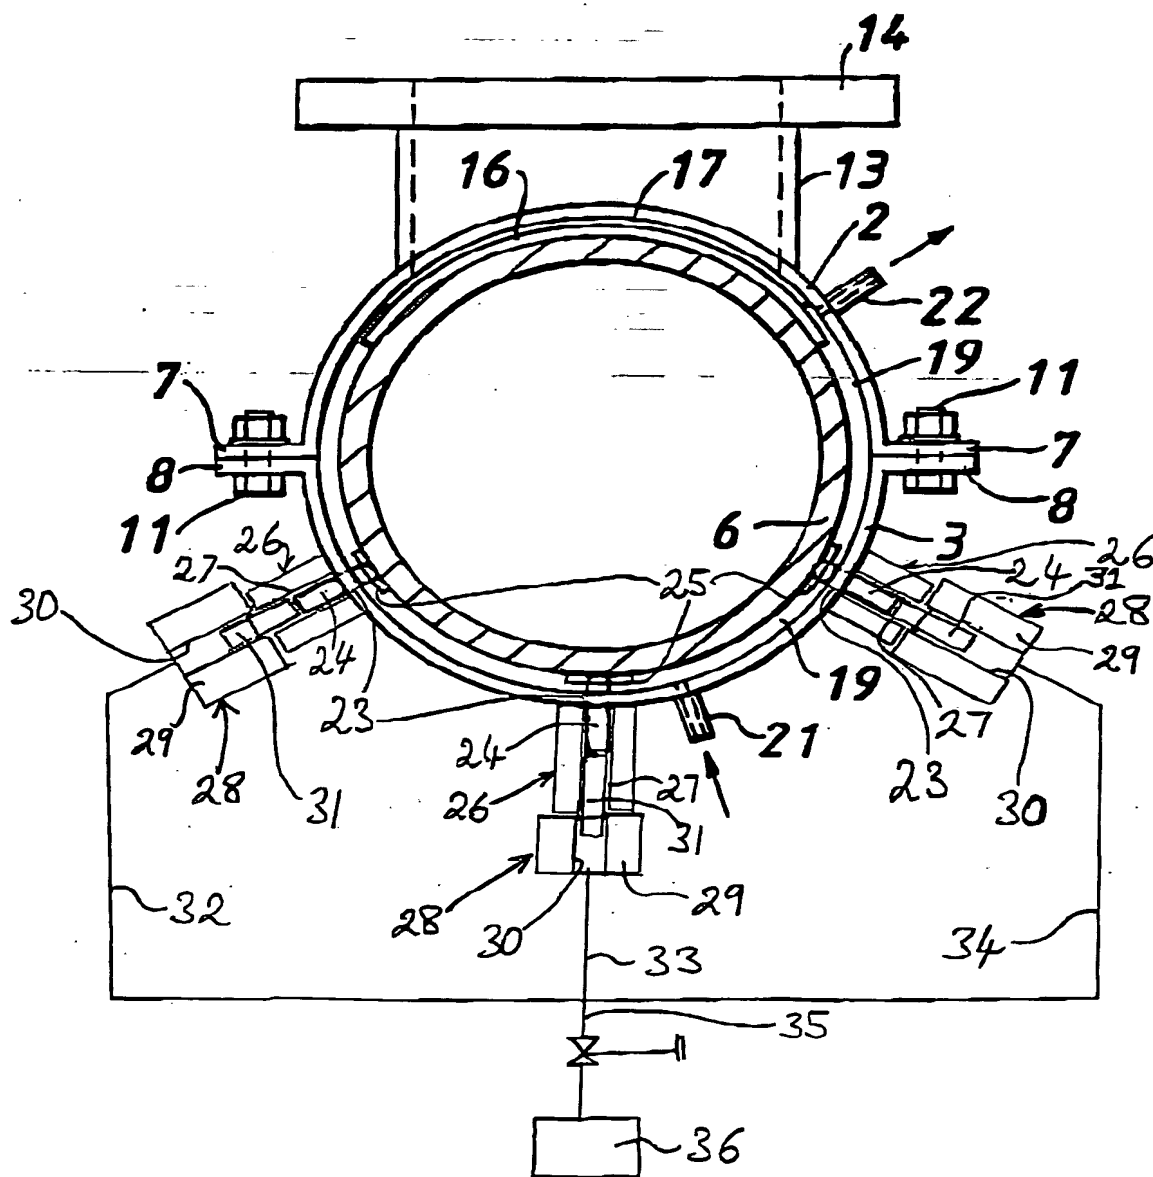






INFORMAL

5/5

FIG. 6

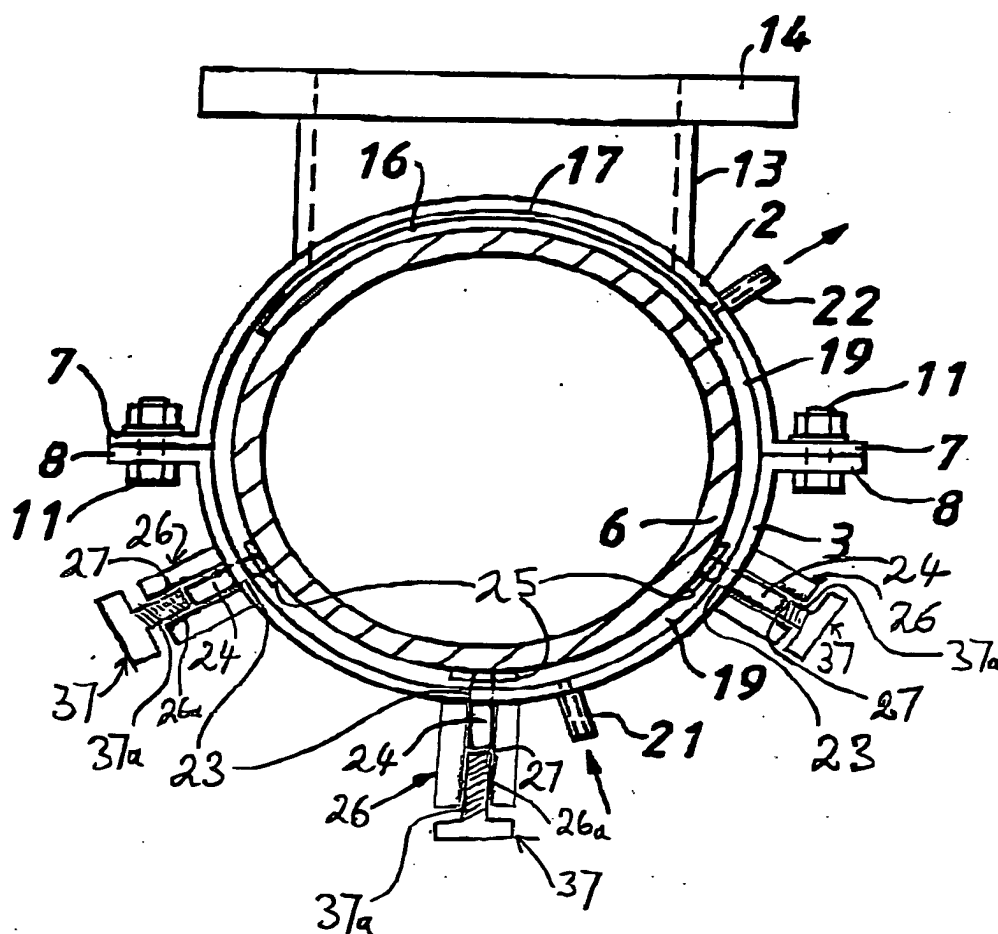

PC 1/4 00 000000 -

23/11 Ad 25-7-2000

BG Intellectual Property